




**8134**

**Flush Precision Cut Diagonal  
Cutter with Tapered Head & ESD  
Safe Handle 0.1-0.8 mm**



## PRODUCT DETAILS

- 80 series precision diagonal cutters with tapered head
- ESD safe mono-material handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for assembly work where accessibility is a consideration
- CO standard handle shape in conductive material

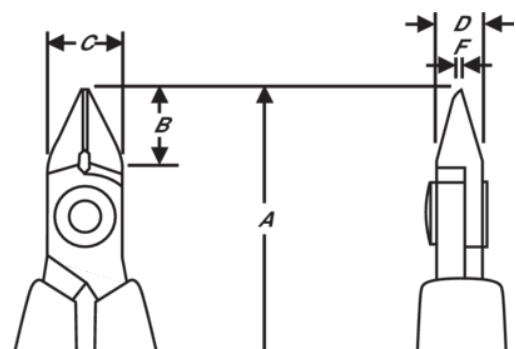

PRODUCT ATTRIBUTES

Product: 8134

|                                                                                   |             |                                                                                   |               |                                                                                   |          |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|----------|
|  | Tapered     |  | XS            |  | Flush    |
|  | 0.1-0.8 mm  |  | 0.004-0.03 in |  |          |
|  |             | <b>A</b>                                                                          | 108 mm        | <b>A</b>                                                                          | 4.25 in  |
| <b>B</b>                                                                          | 8 mm        | <b>B</b>                                                                          | 0.31 in       | <b>C</b>                                                                          | 8 mm     |
| <b>C</b>                                                                          | 0.31 in     | <b>D</b>                                                                          | 5 mm          | <b>D</b>                                                                          | 0.2 inch |
| <b>F</b>                                                                          | 0.8 mm      | <b>F</b>                                                                          | 0.03 in       |  | 43 g     |
| <b>Ω</b>                                                                          | Dissipative |                                                                                   |               |                                                                                   |          |