




## HS7191

**Long Micro-Bevel® Cut Diagonal  
Cutter with Tapered Head & ESD  
Safe Conductive Material Handle  
0.2 mm-1 mm**



### PRODUCT DETAILS

- HS series tapered head cutting pliers
- ESD safe long foam handles with return spring
- Micro-bevel & flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Polished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges

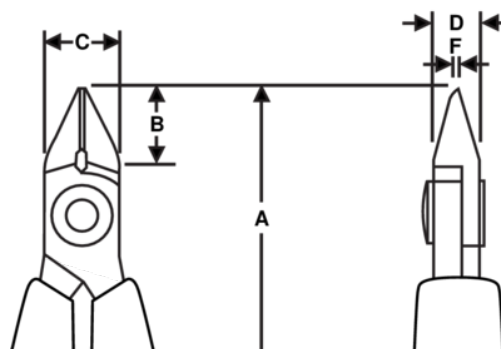

PRODUCT ATTRIBUTES

Product: **HS7191**

|                                                                                   |            |                                                                                   |              |                                                                                   |          |
|-----------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|----------|
|  | Tapered    |  | S            |  | Flush    |
|  | 0.1-1.0 mm |  | 0.01-0.05 in | <b>A</b>                                                                          | 141.3 mm |
| <b>A</b>                                                                          | 5.56 in    | <b>B</b>                                                                          | 9 mm         | <b>B</b>                                                                          | 0.35 in  |
| <b>C</b>                                                                          | 9 mm       | <b>C</b>                                                                          | 0.35 in      | <b>D</b>                                                                          | 6 mm     |
| <b>D</b>                                                                          | 0.24 inch  | <b>F</b>                                                                          | 1 mm         | <b>F</b>                                                                          | 0.04 in  |
|  | 98 g       | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |          |