




## HS8152

### Long Ultra-Flush® Precision Cut Diagonal Cutter with Oval Head & ESD Safe Handle 0.1-1.25 mm



#### PRODUCT DETAILS

- HS series precision diagonal cutters
- ESD safe long foam handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for wire harness work and standard printed circuit board assembly

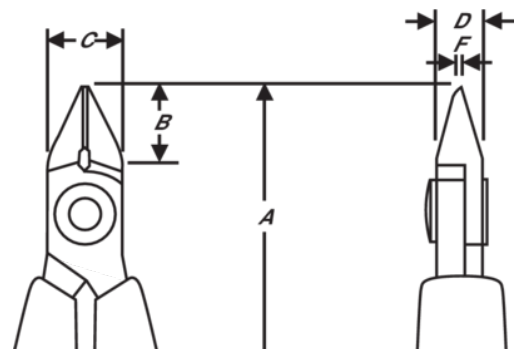

PRODUCT ATTRIBUTES

Product: **HS8152**

|                                                                                   |             |                                                                                   |              |                                                                                   |               |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------|
|  | Oval        |  | M            |  | Ultra-Flush ® |
|  | 0.1-1.25 mm |  | 0.01-0.05 in |  |               |
|  |             | <b>A</b>                                                                          | 144.8 mm     | <b>A</b>                                                                          | 5.70 in       |
| <b>B</b>                                                                          | 12.5 mm     | <b>B</b>                                                                          | 0.5 in       | <b>C</b>                                                                          | 12.5 mm       |
| <b>C</b>                                                                          | 0.49 in     | <b>D</b>                                                                          | 6 mm         | <b>D</b>                                                                          | 0.24 inch     |
| <b>F</b>                                                                          | 1.2 mm      | <b>F</b>                                                                          | 0.05 in      |  | 97 g          |
| <b>Ω</b>                                                                          | Dissipative |                                                                                   |              |                                                                                   |               |