




### HS8167

**Long Ultra-Flush® Precision Cut  
Diagonal Cutter with Tapered &  
Relieved Head & ESD Safe Handle  
0.3-1.5 mm**



## PRODUCT DETAILS

- HS series precision diagonal cutters with tapered & relieved head
- ESD safe long foam handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for wire harness work and standard printed circuit board assembly

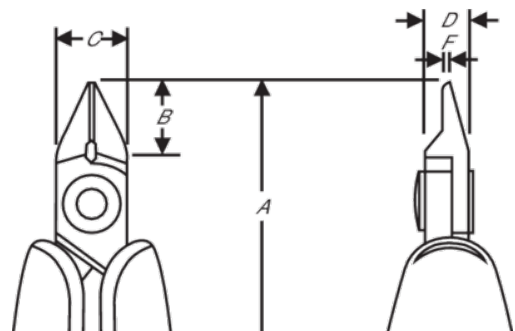

PRODUCT ATTRIBUTES

Product: **HS8167**

|                                                                                   |                    |                                                                                   |              |                                                                                   |         |
|-----------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------|
|  | Tapered & Relieved |  | L            |  | Flush   |
|  | 0.3-1.5 mm         |  | 0.01-0.06 in | <b>A</b>                                                                          | 125 mm  |
| <b>A</b>                                                                          | 4.92 in            | <b>B</b>                                                                          | 16 mm        | <b>B</b>                                                                          | 0.63 in |
| <b>C</b>                                                                          | 16 mm              | <b>C</b>                                                                          | 0.63 in      | <b>D</b>                                                                          | 8 mm    |
| <b>D</b>                                                                          | 0.31 inch          | <b>F</b>                                                                          | 1.6 mm       | <b>F</b>                                                                          | 0.06 in |
|  | 139 g              | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |         |