




## RX8160BPS

### ERGO™ Performance Specific Micro Cut Diagonal Cutters with Oval & Robust Unique Head



#### PRODUCT DETAILS

- Designed to cut multiple guidewires, catheter coil wires & cardiology & urology stents
- Micro-bevel cut
- Sharp & fully aligned edges
- ERGO™ handles with two-component combination, thermoplastic surface, for comfortable grip, on tough polypropylene core for rigidity
- High performance alloyed steel
- Burnished finish
- Numerically controlled machine grinding guarantees edge angle accuracy & contact, increases the tool's reliability & consistency
- Precision induction-hardened edges 63-65 HRC
- Screw joint minimises friction & maximises alignment of cutting edges
- ESD safe handles in two-component synthetic material
- Bio spring limits the tension throughout the working cycle of the tool & can be adjusted to 3 different positions or removed

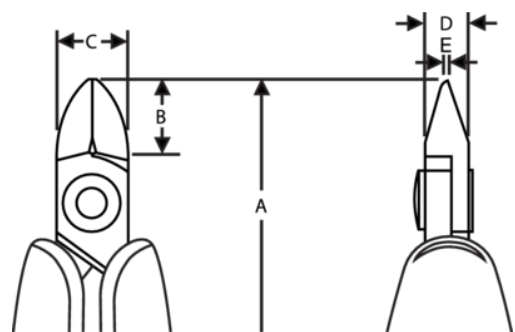

PRODUCT ATTRIBUTES

Product: **RX8160BPS**

|                                                                                   |              |                                                                                   |              |                                                                                   |               |
|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------|
|  | Oval         |  | L            |  | Micro-Bevel ® |
|  | 0.1-1.0 mm   |  | 0.01-0.04 in |  | 0.3-0.8 mm    |
|  | 0.01-0.03 in | <b>A</b>                                                                          | 147 mm       | <b>A</b>                                                                          | 5.80 in       |
| <b>B</b>                                                                          | 16 mm        | <b>B</b>                                                                          | 0.63 in      | <b>C</b>                                                                          | 16 mm         |
| <b>C</b>                                                                          | 0.63 in      | <b>D</b>                                                                          | 8 mm         | <b>D</b>                                                                          | 0.31 inch     |
| <b>E</b>                                                                          | 1.6 mm       | <b>E</b>                                                                          | 0.06 in      |  | 97 g          |